


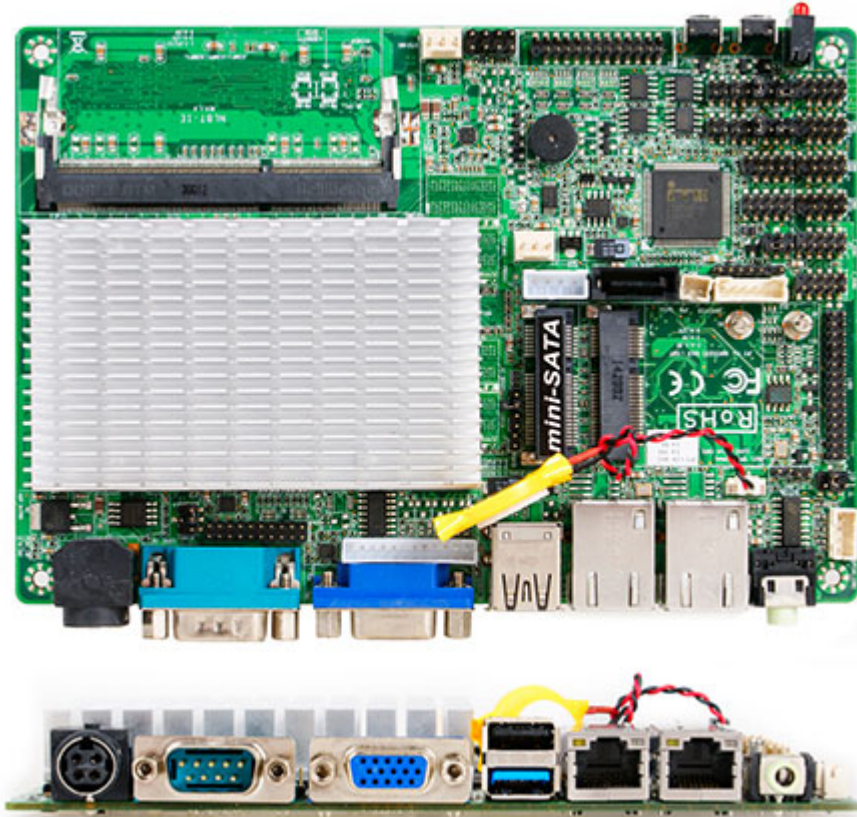

999.00 EUR
incl. 19% VAT, plus [shipping](#)

- [INTEL®](#) BayTrail-M N2930 SOC Chipset
- Onboard INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU
- Support DirectX 11 3D Graphics Acceleration
- Integrated HD Audio CODEC
- Support 2* Gigabit LAN
- Support 1*SATA2.0
- Support 6*COM ports
- Support 5*USB2.0 ports
- Support 1*USB3.0 port
- Support SIM Card Socket
- Support 24-bit Dual channel
- Onboard 1*MiniPCI-E connector(Half size)
- Onboard 1 *M- SATA connector(Full size)
- Support G-sensor Function
- Support TP Connector
- All Tantalum Capacitor design
- Support power onboard(wide voltage input :9~24V)
- Form Factor(165mm X115mm)

CPU	• On board INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU • 2 Phase CPU Power Support
Chipset	• INTEL® BayTrail-M T1900/N2930 SOC Chipset
I.O Chipset	• ITE IT8786E
Memory	• 1* SO-DIMM slot • Support DDR3L 1333 • Max. capacity of system memory up to 8GB
Expansion Slots	• 1* Mini PCI-E connector(Half size)

• Storage	1* Serial ATA2 3Gb/s connector 1* M-SATA Connector(Full size)
• Audio	- ALC887 Audio CODEC - HD Audio CODEC
• Ethernet LAN	2* GIGALAN - Intel i211AT Chip
• LVDS	Onboard 24-bit Dual channel
• USB	5* USB 2.0/1.1(1 distribute in back panel, 4 distribute in mid-board) 1* USB3.0 (distribute in back panel)
• Special Features	- Support G-Sensor Function - Support TP Connector - Support CPU Smart Fan - Support Watch dog Technology - Support GPIO Technology - Support Power Onboard (9~24v wide voltage input) - Support VGA header - Support 1*20-pin HDMI header - Support SIM Card socket - Support 2*RS422/RS485/RS232 for COM2&COM3 - Support Amplifier function(3W) - Support Power& Reset Button - All Tantalum Capacitor design All Power Pack MOSFET design
• Back Panel I / O	1* DC-JACK(Co-lay 4-pin Power connector) 1* USB2.0/1.1 port 1* USB3.0 port 2* RJ-45 ports 1* COM port 1* Line-out connector 1* VGA port
• Internal I / O	2* USB 2.0/1.1 headers for 4 USB 2.0/1.1 ports 1* CPU / Chassis Fan connector 2* System Fan connectors 5* COM headers (Support RS485/RS422/RS232 for COM2&COM3) 1* Parallel header 1* 4-pin SATA Power connector 1* 12-pin VGA header 1* 20-pin HDMI header 1* 24-bit Dual Channel LVDS header 1* 4-pin Amplifier header 1* GPIO header 1* Mini PCI-e connector 1* M-SATA connector 1* SATA2.0 connector 1* 4-pin PS/2 header
• BIOS	AMI 64MB DIP Flash ROM
• Form Factor	EPIC Form Factor(165mm X 115mm)